


HQL DE LUXE

High intensity discharge lamps




- Factories and workshops
- Industrial installations
- Streets
- Car parks, courtyards
- Pedestrian zones, public squares
- Parks and gardens



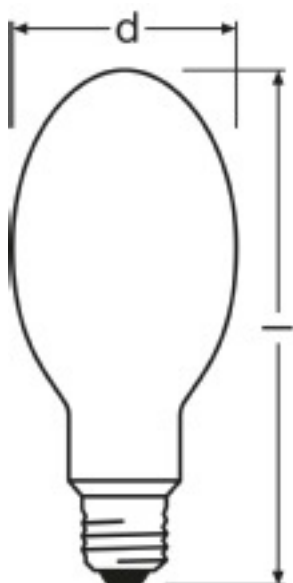

Product line drawing with letters
HQL DE LUXE 50 W DE LUXE E27 | HQL DE LUXE 80 W DE
LUXE E27 | HQL DE LUXE 250 W DE LUXE E27 | HQL DE
LUXE 400 W DE LUXE E27

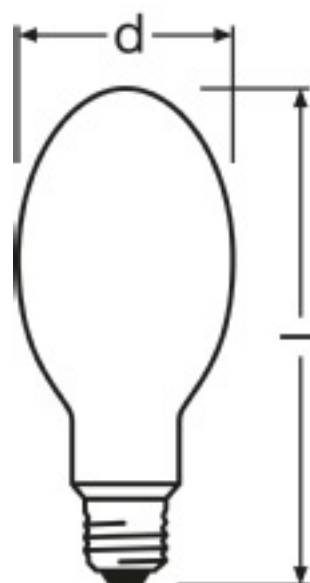

Product line drawing with letters
HQL DE LUXE 125 W DE LUXE E27



E27
IEC 7004-21

Base


HQL DE LUXE 50 W DE LUXE E27 | HQL DE LUXE 80 W DE LUXE E27 | HQL DE LUXE 125 W DE LUXE E27



E 27

Base

HQL DE LUXE 50 W DE LUXE E27 | HQL DE LUXE 80 W DE LUXE E27 | HQL DE LUXE 125 W DE LUXE E27

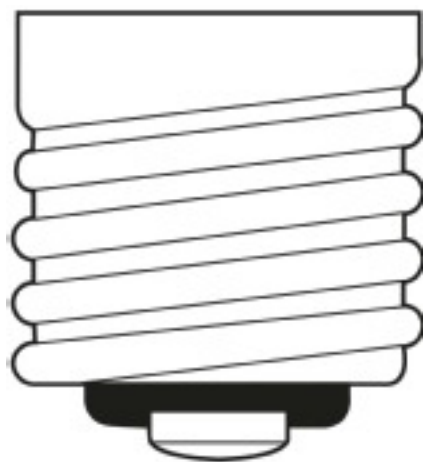

E40
IEC 7004-24
DIN 40825

Base

*HQL DE LUXE 250 W DE LUXE E27 | HQL DE LUXE 400 W
DE LUXE E27*

Technical data

Product description	Nominal wattage	Nominal luminous flux	Base (standard designation)	Diameter	Length
HQL DE LUXE 50 W DE LUXE E27	50 W	2000 lm	E27	56.0 mm	130.0 mm
HQL DE LUXE 80 W DE LUXE E27	80 W	4000 lm	E27	71.0 mm	155.0 mm
HQL DE LUXE 125 W DE LUXE E27	125 W	6800 lm	E27	76.0 mm	168.0 mm
HQL DE LUXE 250 W DE LUXE E27	250 W	14000 lm	E40	91.0 mm	226.0 mm
HQL DE LUXE 400 W DE LUXE E27	400 W	24000 lm	E40	122.0 mm	285.0 mm

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.