



# MASTERColour CDM-T Elite MW

MASTERColour CDM-TMW Elite 315W/930 1CT

The medium wattage lighting system that gives superior, longer-lasting white light for both indoor and outdoor use

## Product data

### • General Characteristics

Cap-Base	PGZ18
Bulb	TMW28 [TMW 28mm]
Bulb Finish	Clear
Operating Position	any [Any or Universal (U)]
Life to 5% failures EL	13900 hr
Life to 10% failures EL	16000 hr
Life to 50% failures EL	30000 hr

### • Light Technical Characteristics

Color Code	930 [CCT of 3000K]
Color Rendering Index	87 (min), 90 (nom) Ra8
Color Designation (text)	Warm White
Color Temperature	3100 K
Color Temperature Technical	3100 K
Luminous Flux Lamp EL	38700 Lm
Luminous Efficacy Lamp EL	120 Lm/W
Lumen Maintenance 2000h	99 %
Lumen Maintenance 5000h	96 %
Lumen Maintenance 8000h	92 %
Lumen Maintenance EL 10000h	90 %
Lumen Maintenance 12000h	89 %
Lumen Maintenance 20000h	80 %

Lumen Maintenance - 10% life	96 %
Lumen Maintenance - 40% life	89 %
Design Mean Lumens	34440 Lm
Chromaticity Coordinate X	0.429 -
Chromaticity Coordinate Y	0.399 -

### • Electrical Characteristics

Lamp Wattage	315 W
Lamp Wattage EL 25°C, Rated	315.0 W
Lamp Wattage EL 25°C, Nominal	315.0 W
Lamp Voltage	100 V
Lamp Current EL	3.15 A
Lamp Current Run-Up	4.7 A
Ignition Time	3 (max) s
Run-up time 90%	1.5 (max) min
Re-ignition Time [min]	10 (max) min

### • Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	28 (max) mg
Picogram per Lumen Hour	27.1 p/LuHr
Energy consumption kWh/1000h	346 kWh

# PHILIPS

## • UV-related Characteristics

Damage Factor D/fc	0.013 -
PET (NIOSH)	141 h500lx
UV A	3.45 mW/cm2
UV B	0.01 mW/cm2
UV C	0.03 mW/cm2

## • Luminaire Design Requirements

Cap-Base Temperature	250 C
Pinch Temperature	300 (max) C
Bulb Temperature	600 (max) C

## • Product Dimensions

Overall Length C	186 (nom), 188 (max) mm
Diameter D	28 (nom), 29 (max) mm
Light Center Length L	88 (min), 90 (nom), 92 (max) mm
Arc Length O	16 mm
Maximum Overall Length [inch]	7.4 (max) in

Light Center Length L [inch]	3.54 in
Diameter D [inch]	1.1 in

## • Product Data


Order code	928601164630
Full product code	928601164630
Full product name	MASTERColour CDM-TMW Elite 315W/930 1CT
Order product name	MASTERC CDM-TMW Elite 315W/930 1CT
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8727900801576
Bar code on outerbox - EAN3	8727900801583
Logistic code(s) - 12NC	928601164630
ILCOS code	MT-315/30/1A-H-PGZ18
Net weight per piece	0.141 kg

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing, except for protected versions with PGZX18 cap, which are designed for open luminaires (IEC61167, IEC 62035, IEC60598)

- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)



## Dimensional drawing

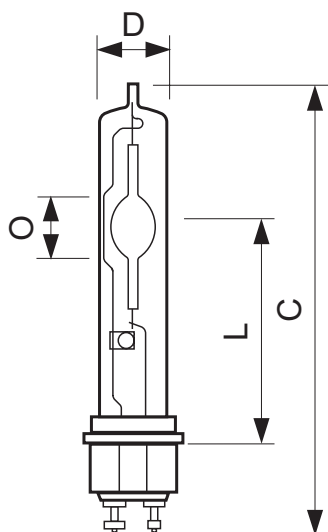


## MASTERColour CDM-TMW Elite 315W/930 1CT

Product	C (Norm)	C (Max)	D (Norm)	D (Max)
CDM-TMW 315W/930 PGZ18 U	186	188	28	29

## Dimensional drawing



## Photometric data

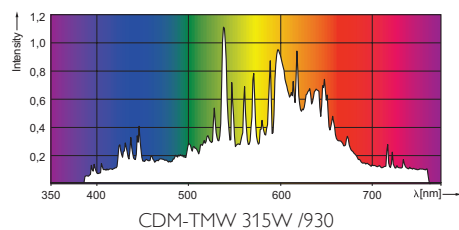

© 2013 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2013, October 15  
data subject to change